


## MD-4U26-800



A flexible and easy-to-maintain server chassis for applications requiring a rack-mounted solution, the MD-4U26-800 is fully compatible with single and dual Xeon and Dual Core Xeon-based, 800MHz FSB serverboards.

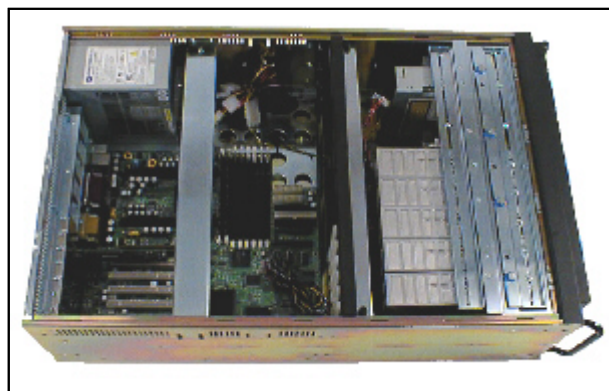

**MILITARY | SURVEILLANCE | MACHINE VISION | FACTORY AUTOMATION**

# MD-4U26-800

## Specifications



### CHASSIS

#### Material

GALXC pre-plated chassis and cover with black powder coat standard finish

#### Weight

65 lbs. with dual processor motherboard + ATX power supply + (2) hard disks + floppy drive + CD-ROM drive

#### Front Panel Controls

Master Power ON switch  
System Reset switch

#### System Indicators

Green LED 5VDC ON  
Yellow LED Disk Activity

#### Dimensions

Height: 7.00" (175 mm)  
Width: 17.00" (430 mm)  
Depth: 26.00" (660mm)

### COOLING FANS

3 x 120mm 105cfm center-mounted cooling fans  
4 x 40mm 20cfm rear exhaust fan kit

### POWER

#### Power Supply

420W ATX P4 Xeon rated switching power supply

### ACCESSIBILITY

Three screw slide and lock top and bottom cover design allows quick access to internal components.

#### MD-4U26H

(3) horizontal 5.25" drive bays  
(1) internal 3.5" HDD drive bay  
(1) slide out drive bay assembly

#### MD-4U26V

(5) vertical 5.25" drive bays  
(1) internal 3.5" HDD drive bay  
(1) slide out drive bay assembly

### ENVIRONMENT

#### Operating Temperature

0° to 50° C

#### Non-Operating Temperature

-20° to 65° C

#### Humidity

5% to 95% @ 40° C (non-condensing)

#### Altitude

10,000 feet (3048 m)

#### Vibration

Non-operating: 5G, 2-200Hz  
Operating: 5G, 2-200Hz

#### Shock

Non-operating: 35G @ 15-20ms  
Operating: 2.5G 15-20ms

### WARRANTY

ONE YEAR PARTS AND LABOR

*Please contact us for ordering and pricing information.*

# MicroDISC

IMAGE PROCESSING SPECIALISTS

301 Oxford Valley Road, Suite 1502  
Yardley, PA 19067

Tel 215.321.9100  
Fax 215.321.9190

[www.microdisc.com](http://www.microdisc.com)  
[sales@microdisc.com](mailto:sales@microdisc.com)